

Switch Mode Power Supplies

S8VK-S

For More Compact Control Panels



- A compact body and side-by-side mounting for more design flexibility
- Greater environment resistance for application in more various locations
- Push-In Plus terminal blocks for easy wiring

New Value For Control Panels

Control Panels: The Heart of Manufacturing Sites.

Evolution in control panels results in large evolution in production facilities.

And if control panel design, control panel manufacturing processes, and human interaction with them are innovated, control panel manufacturing becomes simpler and takes a leap forward.

OMRON will continue to achieve a control panel evolution and process innovation through many undertakings starting with the shared Value Design for Panel *1 concept for the specifications of products used in control panels.



*1 Value Design for Panel


Our shared Value Design for Panel (herein after referred to as "Value Design") concept for the specifications of products used in control panels will create new value to our customer's control panels.

Combining multiple products that share the Value Design concept will further increase the value provided to control panels.

Innovation for panel building Process

Further Evolution for Panels

New Value For Control Panels

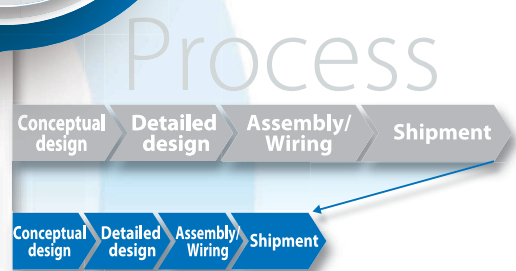

Panels

Simple & Easy for panel business People

People






For More Compact Control Panels

World's Smallest Class of Global Power Supplies* New 240- and 480-W Models Join the S8VK-S Series

Save on space and work, and achieve resistance to environments with the S8VK-S series: and now the new 240- and 480-W models join.

Its extended product line-up provides greater design flexibility.

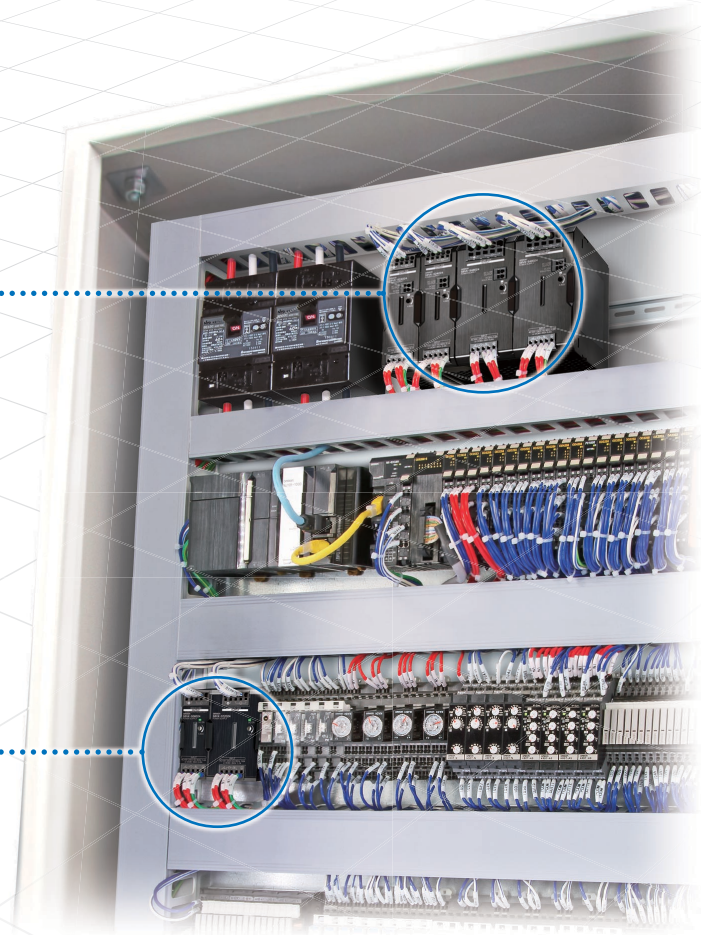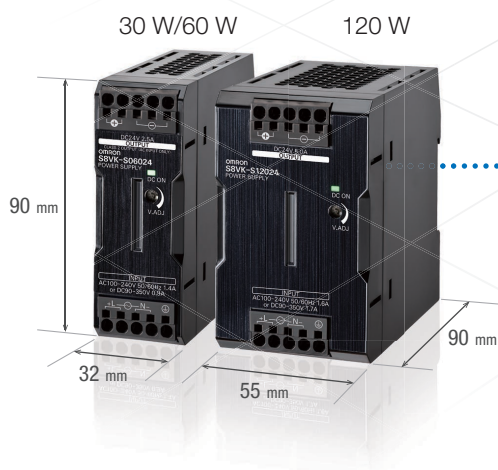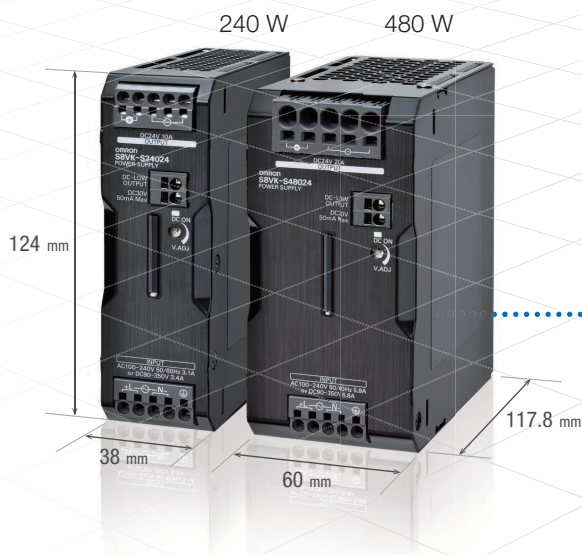

*According to OMRON investigation in September 2016.

World's Smallest Class of Compact Body*¹ and Side-by-side Mounting for More Design Flexibility

Downsizing achieved with high-efficiency, low-loss technology. OMRON's unique thermal control technology enables side-by-side mounting. Less installation area helps you downsize control panels.

Compact Bodies

50%
less volume*²


Previous OMRON Power Supply



S8VK-S(480W)

Side-by-side Mounting to Reduce Installation Area*³

Previous OMRON Power Supply

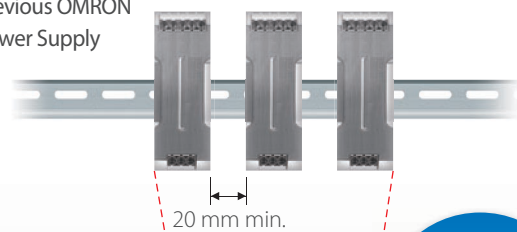

20 mm min.

S8VK-S (60 W)




Installation area reduced by approx. **30%***²

*1. According to OMRON investigation in September 2016.
*2. Comparison to previous OMRON Power Supply.
*3. Conditions apply to models and derating for side-by-side mounting. Refer to the S8VK-S series datasheet for details.


Technology for Greater Efficiency and Less Loss

Technology developed for the S8VK-G has been advanced even further to reduce switching loss and to reduce the loss from heat-generating components, such as transformers and diodes. This has enabled downsizing and high-density mounting of mounted components.

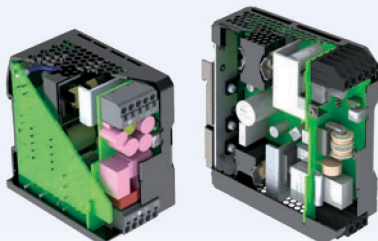

Sophisticated Thermal Control Technology

OMRON's unique thermal modeling knowhow was used to establish fast and accurate thermal simulation methods. The result is optimum component layout with controlling heat flow. By optimizing the shape and size of the heat sink, both downsizing and side-by-side mounting of the Power Supplies was achieved.

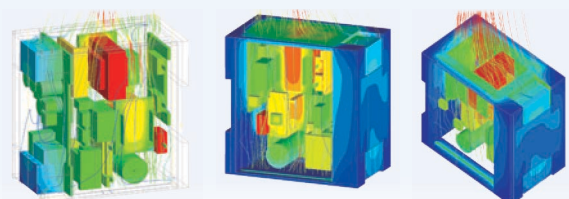

Greater Environment Resistance for Application in More Various Locations

Stable Operation in a Wide Range of Environments

Altitudes up to 3,000 m
 Reinforced insulation and application in environments with low atmospheric pressure.



Vibration resistance to 5G
 Robust design to handle severe vibration conditions.



Humidity resistance of 95%
 Applicable in humid environments.



Resists dust and corrosive gases
 Coated PCBs for stable operation in tough environments.




Coated PCBs are standard features.

Wide range of certified standards
 Design standards for reliable application in many countries around the world.



Comply with UL 508A, Standard for Industrial Control Panels for North America

Abnormal input voltages up to 300 VAC*
 Stable operation even on sites with poor power quality. * for 1s.

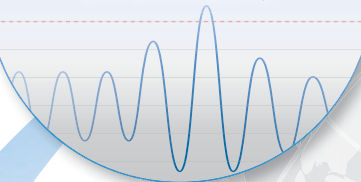

Wide ambient operating temperature range of -40 to 70°C.
 Applicable in tough environments from extreme cold to extreme hot.




Note: These images are for illustration purposes only.

Push-In Plus Terminal Blocks for Easy Wiring



Just Insert Wires: No Tools Required
 Now you can use Push-In Plus terminal blocks to reduce the time and work involved in wiring.

Greatly Reduce Wiring Work with Push-In Plus Terminal Blocks

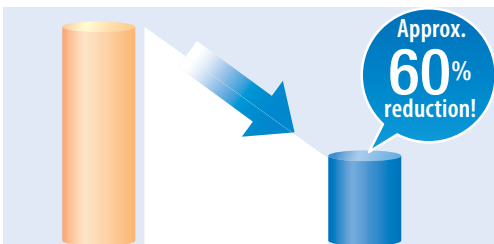

Conventional screw terminal blocks OMRON Push-In Plus terminal block

*Information for Push-In Plus and screw terminal blocks is based on OMRON's actual measurement value data.

Screwdriver Held in Place to Free Both Your Hands

Optimized shape to hold the screwdriver was created by the resin parts and the spring. Work goes smoothly when connecting stranded wires directly to the terminal because it's easier to aim at the desired terminal.

Easy to Insert

OMRON's Push-In Plus terminal blocks are as easy as inserting to an earphone jack. They help reduce the work load and improve wiring quality.

Note: The sense of insertion for connecting the wire to the terminal block depends on the wire diameter.

Held Firmly in Place

Even though less insertion force is required, the wires are held firmly in place. The advanced mechanism design technology and manufacturing technology produced a spring that ensures better workability and reliability.

IEC standard (cable diameter)	Push-In Plus terminal block	Screw terminal block
20 N min. (AWG20,0.5 mm ²)	125 N	112 N

*Information for Push-In Plus and screw terminal blocks is based on OMRON's actual measurement value data.

Ideas to Save Space in Control Panels


Eliminating Transformers for Control Circuits

(For applications with Switch Mode Power Supplies that use a IEC 61558-2-16-compliant transformer)

IEC 60204-1 in the Machinery Directive specifies that, if AC power is supplied to a control circuit, a transformer must be used in the control circuit and the transformer must have separate (compound) windings.

The Control Circuit Transformer Built into the S8VK Eliminates the Need for an Independent Transformer

IEC 60204-1 also states that a switch mode power supply that uses a transformer with separate (compound) windings satisfies the above condition. That means that a transformer in a control circuit can be eliminated by using this type of switch mode power supply.

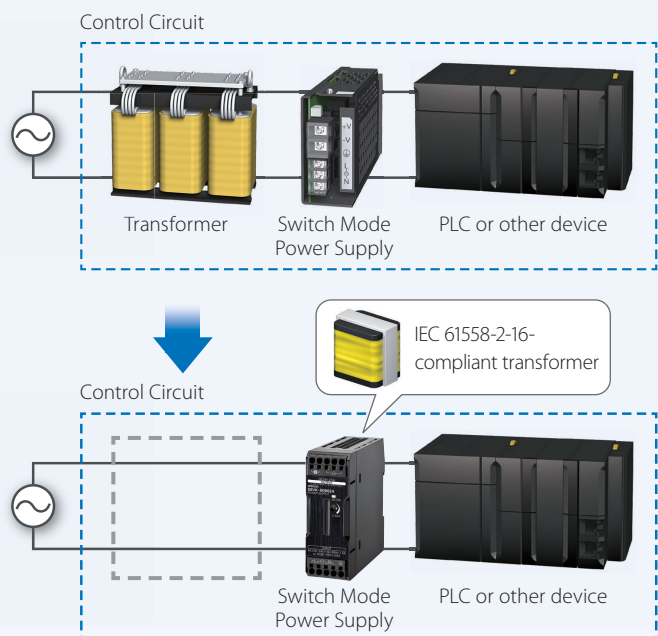


Product Lineup

S8VK-S



A Perfect Fit for Small Control Panels
Coated PCBs for Better Resistance to Environment
Push-In Plus Terminal Blocks for Easy Wiring

Power rating/output voltage

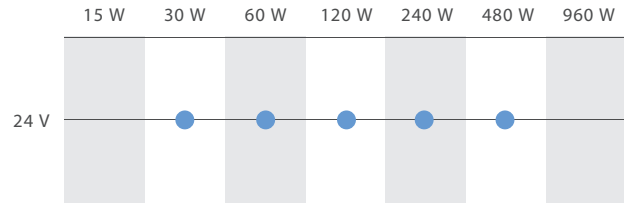

Power rating	Rated input voltage	Rated output voltage	Rated output current	Undervoltage alarm output	Maximum boost current	Size (W×H×D) (mm)	Model
30 W	100 to 240 VAC (allowable range: 85 to 264 VAC or 90 to 350 VDC)	24 V	1.3 A	No	1.56 A	32×90×90	S8VK-S03024
60 W		24 V	2.5 A	No	3 A	32×90×90	S8VK-S06024
120 W		24 V	5 A	No	6 A	55×90×90	S8VK-S12024
240 W		24 V	10 A	Yes	15 A	38×124×117.8	S8VK-S24024
480 W		24 V	20 A	Yes	30 A	60×124×117.8	S8VK-S48024


S8VK-X



IoT power supply with communication/display functions

Ensure innovative equipment maintenance through power supply visualization.
Take advantage of a slim design that follows our Value Design for Panel concept for improved equipment downsizing.

Power rating/output voltage

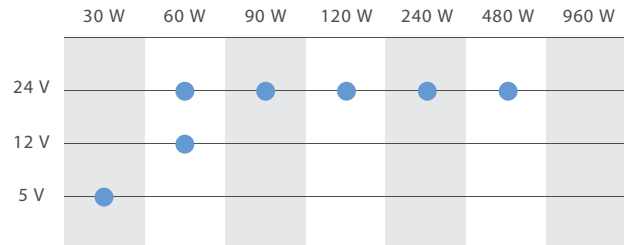


S8VK-WA



Three-phase, 200 V input power supply

Solve three-phase balance problems using three-phase, 200 V input. Equipped with 3-LED/signal output for improved early detection of error locations.
Save space while furthering downsizing efforts.

Power rating/output voltage




S8V-NF

Noise Filter



DIN Rail Mounting Type Ideal for Control Panels
Featuring a Slim Design that Saves Space
Push-In Connections for Safe and Easy Wiring

Rated current



Products That Create New Value in Control Panels



Switch Mode Power Supplies
S8VK-S



Uninterruptible Power Supply (UPS)
S8BA



Power Monitors
KM-N2/KM-N3



Machine Automation Controllers
NX Series
NX1P



Measuring and Monitoring Relays
K8DT



Solid-state Timers
H3DT




Solid-state Timers
H3Y(N)-B



Solid-state Timers
H3RN-B



Liquid Leakage Sensor Amplifiers
K7L-B



EtherCAT Slave Terminals
NX Series
NX-IO



Sockets for Relays with Forcibly Guided Contacts (for G7SA)
P7SA-PU



Common Sockets (for MY/H3Y(N)-B)
PYF-PU(-L)




Common Sockets (for G2R-S/H3RN-B/K7L-B)
P2RF-PU



Slim I/O Relays
G2RV-SR



Slim I/O Relays
G3RV-SR



I/O Relay Terminals
G70V



DIN Track Terminal Block
XWST



Pushbutton Switches Push-In Plus Terminal Block Series
A22N-P/A30N-P/M22N-P



Emergency Stop Switches
A22NE-P



Solid State Relays for Heaters
G3PJ



Digital Temperature Controllers
E5CC-B/E5EC-B



Digital Temperature Controllers
E5CD-B/E5ED-B



Switch Mode Power Supplies
S8VK-X



Noise Filter
S8V-NF



Wireless Pushbutton Switches
A2W



Motor Condition Monitoring Devices
K6CM

Panel Assist Web

www.ia.omron.com/solution/panel/



Refer to the S8VK-S Switch Mode Power Supplies Datasheet (Cat. No. T205) for details.

Before you place an order, please read and understand "Agreement for Using the Product" available on Omron's latest "Best control devices Omron", "General Brochure" or Omron's website.

OMRON Corporation Industrial Automation Company
Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2016-2017 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_1_7_0419
Cat. No. T206-E1-03

0317 (0316)